



WATERPROOF VIENA LED

PROFESSIONAL LIGHTING

The Vienna Led light is the ideal solution for overhead lighting of any space, especially indicated in industrial areas.



PROFESSIONAL
LED SPOTLIGHTS
WITH WIDE
RANGE OF
POWERS.
MAXIMUM
EFFICIENCY



VIENA LED

With a large size and 120mm wide aluminum housing, the Quattro series triple proof light gets a high peak power of 150W and perfect thermal conductivity.

Quick connect waterproof cable connector design helps customer save 30% installation labor cost. The 3x1.5mm², 3x2.5mm², 5x1.5mm² and 5x2.5mm² cables have the option to be connected in series.

LED FEATURES



> LARGE SIZE ALUMINUM

Perfect thermal conductivity of 226 W/m.k.




> MAXIMUM POWER AND EFFICIENCY

1500*122*102mm  80,120,150W

1500*122*102mm  40,60,80W

1500*122*102mm  30W

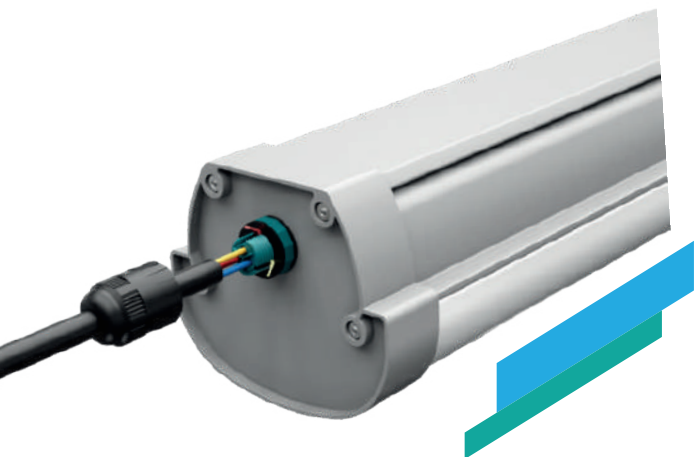


> NO SCREWS

Quick-connect waterproof cable connector design helps save 30% on installation labor costs.

®

LED FEATURES

> CONNECTION CABLE



3x1.5mm²

3x2.5mm²

5x1.5mm²

5x2.5mm²

> SERIES JOIN

The charging capacity per series is up to 14400W



> Easy installation



Fixation
due to suspension



Fixation
by anchor




180° Addressable

®

TECHNICAL CHARACTERISTICS

- > **Housing:** Aluminum
- > **Conductivity:** 226 W/m K
- > **LED:** Bridgelux
- > **CRI:** Ra>80
- > **SDCM:** <6
- > **Power factor:** >0.95
- > **THD:** <15
- > **Power Supply:** Osram / Sosen
- > **Driver efficiency:** >93%
- > **Protection:** OTP, OCP, OVP, SCP
- > **Surge protection:** 4KV
- > **Waterproof:** IP66
- > **Impact test:** IK10
- > **Power:** 220-240V, 50/60Hz
- > **Operating temperature:** -20~40 °C
- > **TM21:** L80B10>50,000H


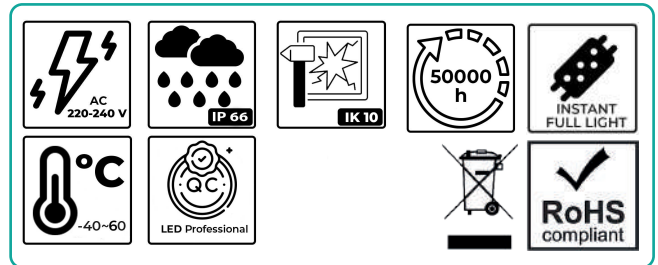


EXTRAS CUSTOM MANUFACTURING



Model	W	V	Lum	CRI	IP	Dimensions
VI030QE2H-BO	30W	220~240V	4800LM	>80	IP66	600*122*102mm
VI040QE4H-BO	40 W	220~240V	6400LM	>80	IP66	1200*122*102mm
VI060QE4H-BO	60 W	220~240V	9600LM	>80	IP66	1200*122*102mm
VI080QE4H-BO	80 W	220~240V	12800LM	>80	IP66	1200*122*102mm
VI080QE5H-BO	80 W	220~240V	12800LM	>80	IP66	1500*122*102mm
VI120QE4H-BS	120 W	220~240V	19200LM	>80	IP66	1200*122*102mm
VI120QE5H-BS	120 W	220~240V	19200LM	>80	IP66	1500*122*102mm
VI150QE5H-BS	150 W	220~240V	24000LM	>80	IP66	1500*122*102mm

OPTICS OPTIONS

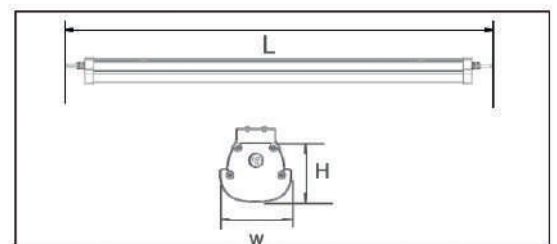

+34 916357859



WWW.OPTIMALED.EU

OptimaLED[®] **ProTour**[®]

LIGHTING **EVOLUTION**

“
LEADING THE
WAY TOWARDS
A BRIGHT FUTURE”



WWW.OPTIMALED.EU

C/ Geológicas, 62
28923 Madrid - Spain

PHONE
+34916357859