

Floodlight REVIVAL

PROFESSIONAL LIGHTING

Thanks to a robust aluminum housing with a tempered safety glass cover, a driver, and a high-quality LED, our state-of-the-art REVIVAL FLOODLIGHT offers high luminous efficacy of up to 160 LPW and a long lifespan.



FLOODLIGHT REVIVAL




**LED
FLOODLIGHTS
PROFESSIONAL
WITH A WIDE
RANGE
OF POWER
OPTIONS.**

The state-of-the-art REVIVAL floodlight, available in various power options, is equipped with high-efficiency LEDs and a UGR index < 19 , ensuring superior lighting quality and visual comfort for both indoor and outdoor applications, combined with unmatched reliability. With a uniform photometric distribution, this LED floodlight achieves an outstanding luminous efficiency of 160 Lm/W, optimizing energy consumption without compromising performance.

Designed with a robust aluminum housing and a tempered safety glass cover, this IP66-certified floodlight is ideal for outdoor applications such as building façade walls, gardens, sports courts like paddle or tennis, and open-air parking lots. Its innovative design makes it the perfect solution for any environment requiring efficient and durable lighting.



LED FLOODLIGHT FEATURES

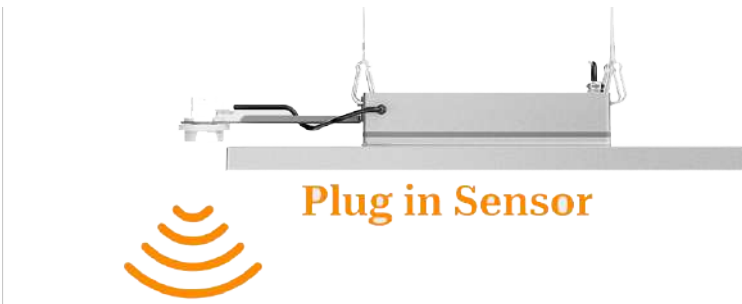


160
Lm/W
REAL



- > **Tool-Free Grill Installation: Helps further reduce UGR levels.**



- > **SMOOTH SURFACE**
(No accumulation of dust or water).
- > **PURE ALUMINUM**
(Maximum durability).

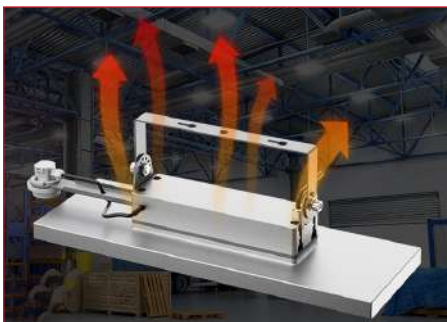


- > **EFFICIENT DIFFUSER**




CARACTERÍSTICAS TÉCNICAS

- Housing: Cast Aluminum
- Conductivity: 96 W/m·K
- LED: PHILIPS
- CRI: Ra>80 (90 option available)
- SDCM: <6
- Power Factor: >0.95
- THD: <15
- Driver: SOSEN
- Driver Efficiency: >93%
- Protection: OTP, OCP, OVP, SCP
- Surge Protection: 4kV-6kV
- Waterproof: IP65
- Impact Test: IK10
- Operating Temperature: -40~50 °C
- TM21: L80B10>50,000H

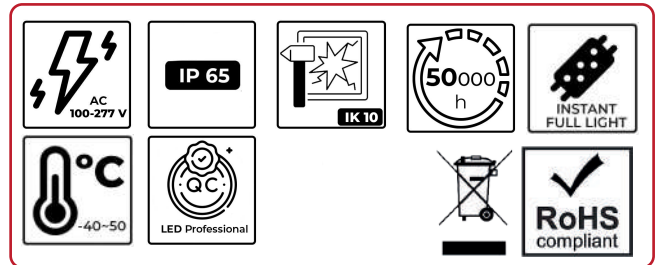


CUSTOM MANUFACTURING EXTRAS

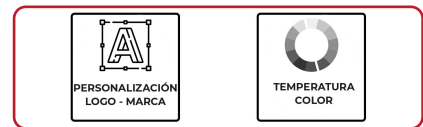

MODEL	W	V	LumenS	CRI	IP	Dimensions
RVAL-60W	60 W	100~277V	9600LM	>80	IP65	L357*W184*H81MM
RVAL-100W	100 W	100~277V	16000LM	>80	IP65	L357*W184*H81MM
RVAL-120W	120 W	100~277V	19200LM	>80	IP65	L357*W184*H81MM
RVAL-150W	150 W	100~277V	24000LM	>80	IP65	L357*W184*H81MM
RVAL-200W	200 W	100~277V	32000LM	>80	IP65	L533*W184*H81MM

Optical Options

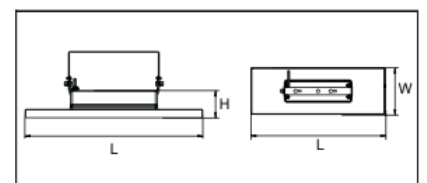

+34 916357859



OptimaLED[®] ProTour[®]

LIGHTING **EVOLUTION**

“

LIDERANDO EL
CAMINO HACIA
UN FUTURO
BRILLANTE

”



OPTIMALED

C/ Geológicas, 62
28923 Madrid - Spain

+34916357859